

**TECHSPRAY®**Precision Cleaning Technologies
for the Electronics Industry

PRODUCTION SUPPLIES



Conformal Coatings

Protect printed circuit boards (PCB) with Techspray conformal coatings. Coating can either be sprayed and brushed, or boards can be dipped directly into the conformal coating for a thick layer of protection.

RoHS Compliant 

- Designed to Protect PCB's
- Can Be Removed for Rework or Repair
- Contain Opti/Scan for UV Inspection

2102 FINE-L-KOTE SR

Silicone Conformal Coating

- UL recognized
- Thermal resistance — to 200°C
- Dielectric strength — 1100 volts/mil
- Moisture resistant
- Chemically resistant
- Vibration resistant — flexible
- IPC-CC-830 & MIL-I-64058C approved

2102-12S 463 mL aerosol

2102-G 3.8 L in metal pail



2108 TURBO-COAT

Acrylic Conformal Coating

- Fastest thermal cure
- Faster throughput without capital investment
- Thick coating — one-pass application
- Fast & easy rework & repair
- Thermal resistance — 125°C
- Dielectric strength — 1000 volts/mil
- IPC-CC-830 & MIL-I-64058C approved
- UL94 V-0 rated

2108-12S 280 mL aerosol


2108-G 3.8 L in metal pail





Temporary Solder Mask

Prevent soldering protected areas in a wave soldering process by applying WonderMASK®. Designed to apply smoothly, dry quickly, withstand high, lead-free process temperatures, and then be removed easily.

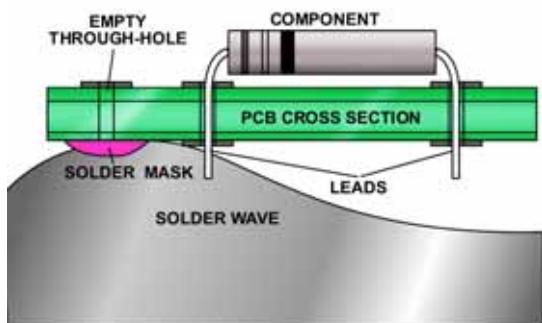

2218 WONDERMASK PL

Natural latex peelable solder mask with fastest cure time.

- Fastest full cure
- Easily peelable
- Highest strength to avoid breakage
- Non-flammable

2218-8SQ 237 mL squeeze bottle
2218-G 3.8 L in plastic jug



2211 WONDERMASK P

Techspray's original synthetic latex peelable solder mask.

- Easily peelable
- Low odor
- Cure indicator – darkens as it cures
- Compatible with gold and copper leads
- Non-corrosive
- Non-flammable
- Long shelf-life

2211-8SQ 237 mL squeeze bottle
2211-G 3.8 L in plastic pail
2211-54G 204 L in plastic drum



intertronics

Tel: 01865 842842 Oxfordshire, UK
www.intertronics.co.uk